

# Nokia Series 60 Quick Start Guide



**pushTalk**  
provided by  
**inTechnology**



# Series 60 Quick Start Guide


Setting up the Push To Talk (PTT) service on your Nokia Series 60 Handset.

Using Push To Talk you are able to hold one-to-one and one-to-many conversations, as well as being able to show your current availability, presence or status.


The screens in this guide are the standard Nokia Series 60 screens, depending upon handset model, your screens may vary slightly, however the screen flow will remain consistent.

## Setting up Push To Talk (PTT) for the first time


1. Firstly, ensure that your handset has been fully charged and your SIM has been activated with the Push To Talk service.
2. To set up Push To Talk on your device you will be sent two text messages, if you have not received these then contact your Push To Talk service provider.
3. Open the first message from 'Service Provider', select 'Options' and then 'Save'.

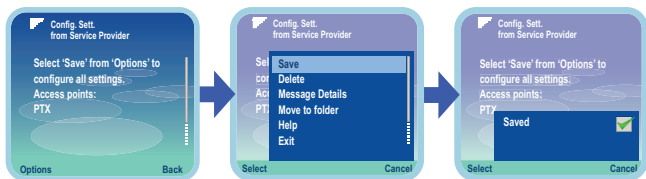

- Now open the second message from 'Intech'. Highlight and click on the link and select 'Open Link' and, if requested, select the 'PTX' access point.

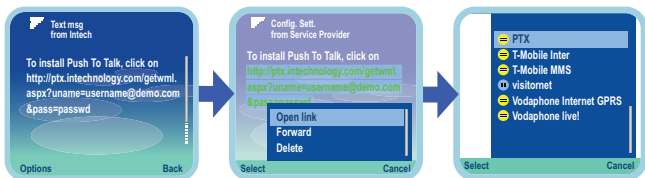


- Your web browser should now open and load the below page, make note of your username and password as this will be needed later to log into your PTT Client.

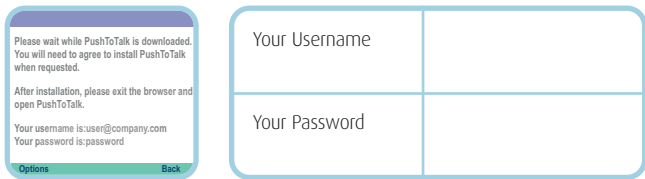


- You are now ready to download your PTT client to your handset, select 'OK' and then 'Yes' to install.



7. Confirm software by selecting 'Continue' and, if requested, save to your 'Phone Memory'. The software will now be installed.

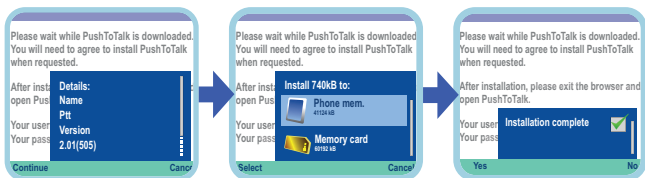

8. Locate the PTT software. It is likely to be in either the 'Installation', 'Apps', or 'My Own' folder on the main menu. Click on the PTT icon and follow the below screens.

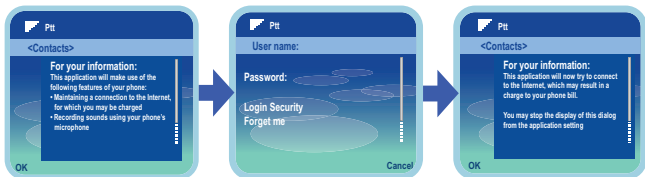

Click 'OK'

Enter your username and password

Click 'OK'

9. If requested, confirm access point name as 'PTX'. You will then be presented with the below screens.



Your Push To Talk service has now been installed and is ready to use.

## Your Status


Your Status informs other users of your availability, and can be manually changed. You can also view the status of other users and this tells you whether you will be able to contact them.

The status modes are;

- **Online** – you are available to accept calls
- **Do not disturb** – you will not be able to accept calls, but can initiate a call
- **Page Me** – you are notified of incoming calls and you chose whether to accept
- **Offline** – neither able to accept or initiate a call

### Changing your status

From any Push To Talk screen select 'Menu', then 'Status' and then select desired status.

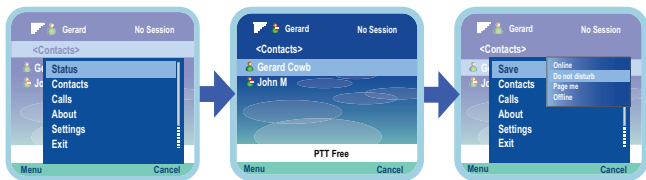




# Contact Management

## Adding a new contact


You can add new personal contacts by selecting them from a group or searching for them by name.

### Selecting from an existing group


Scroll to group containing the required contact and select contact you wish to add.



Select contact




Press 'Menu' and select 'Add to Contacts'




Confirm contact

### Searching for a new contact


You can search by name for other users, as long as they are set up on the same account as you.



Select 'New Contact'



Enter part of name you wish to add




Select required contact




# Making a Call

## 1. One to One Call


Select the contact you wish to speak to from your contacts list or a group list. Hold down Push To Talk (normally the volume down button) to start conversation.



Select contact



Highlight contact



Hold down Push To Talk button

## 2. Broadcasting to Many

You can broadcast to many by selecting contacts from your contact lists or by selecting a pre-set group.

### Ad-Hoc conversation

Select contacts you need speak to from your contacts list or a group, then hold down the 'Push To Talk' button to start your conversation.



### Broadcast to a Group

This allows you to broadcast to a pre-set group. Simply scroll to the group you wish to broadcast to, select the group and press the Push To Talk button.





# pushTalk

provided by  
**inTechnology**

InTechnology plc  
Central House  
Beckwith Knowle  
Harrogate HG3 1UG

Telephone +44 (0)1423 850000  
Facsimile +44 (0)1423 850001

[www.pushstoexperience.com](http://www.pushstoexperience.com)  
[ptt@intechology.com](mailto:ptt@intechology.com)  
Registered in England 3916586

InTechnology plc  
Commensus House  
3-5 Worton Drive  
Reading  
Berkshire RG2 0TG

Telephone +44 (0)870 777 7778  
Facsimile +44 (0)870 777 7779

InTechnology plc  
17 St Helens Place  
Bishopsgate  
London EC3A 6DG

Telephone +44 (0)20 30 40 50 00  
Facsimile +44 (0)20 30 40 50 01